



### Applications

- Application or Equipment Performance Validation & Optimization
- Corporate WAN Planning
- IPTV, VoIP, Video Conf.
- Storage Extension
- Data Center Migration
- Disaster Recovery Testing
- Capacity Planning
- WAN Acceleration Testing
- OAM Implementation Validation
- Redundant Path/Fail-over System Testing
- Interoperability Testing
- Security Protocol Testing
- FCoE System Testing
- QoS Testing

### Benefits

- Increased system performance and robustness with complete testing of usage and error scenarios
- Reduced time-to-market with faster test case creation and repeatable testing
- Increased productivity with automated generation of specific error scenarios
- Eliminate costly post-deployment operational and performance issues
- Faster root-cause analysis of problems in deployed systems

### Frame Impairments

- Delay / Delay Jitter
- Drop
- Reorder
- Duplicate
- Corrupt, Modify
- Checksum errors
- Bandwidth control
- Layer2 FCS, FCoE, and IP/UDP/TCP CRCs can be optionally corrected for modified frames

### PHY Layer Impairments

- Bit Errors
- Bit Rotation
- Advanced LOS

### Overview

VirtualNet™ GE and XG are high-performance in-line (pass-thru) 1G/10G Ethernet test systems that enable development and verification engineers to validate proper system response to error conditions that can occur in deployed systems. VirtualNet Ethernet emulators modify/impair live bi-directional traffic according to user-specified parameters and duration as traffic passes through.

With VirtualNet in their test and verification setups, engineers can introduce bit-errors, delay, bandwidth controls, frame drop, corrupt frame data, modify specific protocol fields in selected frames and observe the resulting system response. This testing enables validation of system performance and robustness under any desired scenario. Thorough testing for these corner cases is essential for optimizing performance and avoiding costly post-deployment operational issues.

Unlike other emulators, VirtualNet Emulators are hardware-based network emulators (using dedicated FPGAs), delivering full [line-rate](#) performance for 1G and 10G Ethernet traffic at **ALL** frame sizes **AND** regardless of the impairment settings applied. With the ability to replicate real-world network conditions in a 100% controlled manner, users are ensured that no other variable has been introduced into testing and results are precise and, most importantly, repeatable.

### Overview

- **Performance:** Full line-rate regardless of the incoming frame sizes, number of impairments, or the specified parameters for impairments
- **Targeted Impairments:** Unique ability to select a particular frame for specific impairments based on user-specified frame protocol field values
- **Protocol/Field Parsing:** Frames are parsed in hardware to recognize specific protocol fields irrespective of the protocol hierarchy
- **Impairment Duration:** Impairments can be specified as having infinite as well as finite duration in units of Time, Frames, and Bytes
- **QoS:** 8 queues with user-specified bandwidth, buffer space, and output scheduling (priority or round-robin)
- **Transparent Installation:** Only specified traffic is impaired (other non-test traffic is bypassed without delay or impairments) to enable in-line installation with co-mingled production and DUT network traffic
- **Dynamic Impairment Parameters:** Impairment parameters can be changed during testing without disrupting the traffic stream or creating unintended intermediate impairment conditions
- **Analysis:** Detailed real-time statistics for bi-directional Ingress/Egress traffic as well as statistics related to impairments created by the VirtualNet. All statistics may be recorded to a CSV file for post-analysis.
- **Multiple ports:** Up to Eight (8) 1G ports or Two (2) 10G ports + Four (4) 1G ports with simultaneous operation on all ports
- **Usability:** Intuitive GUI and powerful TCL based CLI for testing automation.

**Better Testing → Better Reliability → Better Products**

## Functional Specifications

	VirtualNet GE (1G)	VirtualNet XG (10G)
<b>Throughput</b>	Full line-rate = 2 Gbps – at all frame sizes – all impairment settings	Full line-rate = 20 Gbps – at all frame sizes – all impairment settings
<b>Transparent Installation</b>	Yes	
<b>Protocol Stack Parser</b>	Included Protocols – VLAN, MPLS, IPv4, IPv6, TCP, UDP, FCoE, <b>Custom</b>	
<b>Targeted Impairments</b>	Field Comparisons =, ≠, ≥, ≤, Range, Out-of-Range Multiple comparisons can be combined with AND / OR conditions	
<b>QoS Emulation</b>	8 Queues – Queue assignment based on VLAN Priority, DSCP/TOS, or User Specification Bandwidth, Buffer size, and Output Scheduling (Priority or Round Robin) controls	
<b>Bandwidth Control</b>	1Kb/s to 1Gb/s, ± 0.5 Kb/s	1Kb/s to 10Gb/s, ± 0.5 Kb/s
	Buffer size and Pause frames controls, Background traffic emulation	
<b>Frame Drop</b>	Rate – 1E-7% (1E-9) to 100%. Distributions – Uniform, Periodic, "Bursty"	
<b>Reorder</b>	Block reorder, up to 16 KB, Reorder Delay – Frame/Time-based	
<b>Duplication</b>	Block Duplication – up to 16 KB – Duplication count – 1 to 255 Duplication Delay – Frame/Time based	
<b>Data Corruption</b>	Rate – 1E-2 to 1E-12, User specified corruption envelope to protect or corrupt headers Checksum Correction Options: L2, FCoE, IPV4/6, TCP, UDP	
<b>Data Modification</b>	4 Engines, 32 bytes each	2 Engines, 256 bytes each
	Checksum Correction Options: L2, FCoE, IPV4/6, TCP, UDP	
<b>CRC Errors</b>	L2, FCoE, IPV4/6, TCP, UDP	
<b>Delay</b>	50us to 10Sec – 8ns resolution	8us to 10Sec – 6.4ns resolution
	Max. 250ms at Full Line Rate, Fixed/Variable Distributions	
<b>Layer 1 Bit Errors</b>	Rate – 1E-2 to 1E-12, Burst Length – 1 to 32767 bits (Optical interfaces only)	
<b>Output (Laser) Disable</b>	25ms minimum, Fixed/Random Cycle Times (200us resolution) ( <b>Optical interfaces only</b> )	
<b>Real-Time Statistics</b>	L1/L2 Errors, Interface Traffic, Impairments, Logging for all stats	

## Physical Specifications

<b>Data Interfaces</b>	Eight (8) 1G Ports – 850 or 1310nm Optical; 10M/100M/1G Copper (1000-Base-T) Two (2) 10G Ports – 850, 1310, or 1550nm Optical
<b>Management Interface</b>	1 x Gigabit Ethernet, GUI and Tcl-based CLI
<b>Input Power</b>	100VAC to 240VAC, 50–60Hz, 225 Watts (Max.)
<b>Dimensions / Weight</b>	19" Rack-mountable, 4U (7" (H) x 16 7/8" (W) x 17 11/16" (D)) 40 lbs.


## Contact Info

GigaNet Systems  
555 Round Rock West Drive  
Bldg. E, Suite 212  
Round Rock, Texas  
78681

**Phone:** +1-512-410-6784

**Fax:** +1-512-366-9340

**Sales:** ww\_sales@giganetsystems.com

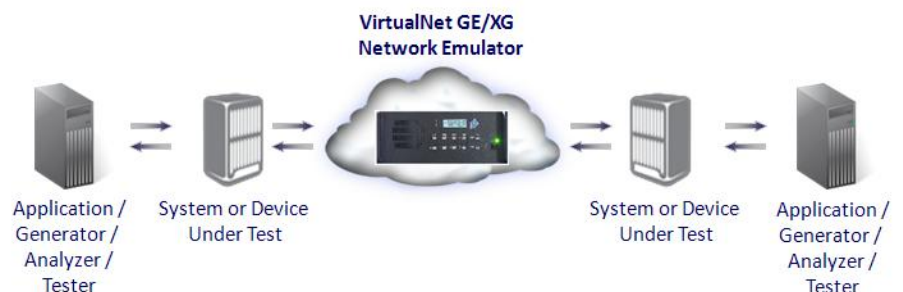

Typical testbed setup using Ethernet network emulator

**Better Testing → Better Reliability → Better Products**

[www.giganetsystems.com](http://www.giganetsystems.com)